


BarnMini – 01

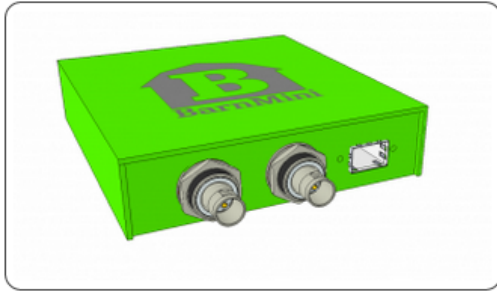

Open to any MSA standard SFPs.

Making it easier to use standard SFPs as used in our BarnOne series.

Technical Specifications

Electrical ports

- 1x TX BNC port
- 1x RX BNC port
- 75 OHM BNC connector
- SMPTE 259M, 292M, 372M, 424M, DVB-ASI
- Multirate reclocking of outputs 270Mbit/s – 3Gbit/s
- Automatic cable EQ (Belden 1694A) 270Mbit/s-250m, 1.5Gbit/s-140m, 3Gbit/s-80m

Optical ports

- 1x fiberoptical port (SFP) , Duplex transceivers , LC/PC connectors (optional HDMI, HD-BNC, RJ45)
- SMPTE 259M, 292M, 372M, 424M, 297M, DVB-ASI
- Multirate reclocking of outputs 270Mbit/s – 3Gbit/s
- Hot pluggable/swappable
- Singlemode and/or Multimode
- 16 CWDM wavelength selections – ITU-T G.694.2

Power supply

- 12-24V DC. Power supply included

Physical size

- 92mm x 98mm x 22mm
- 200g

Model name

- BM-01