


# Spectrum™ MediaDirector 2252B

SYSTEM CONTROLLER

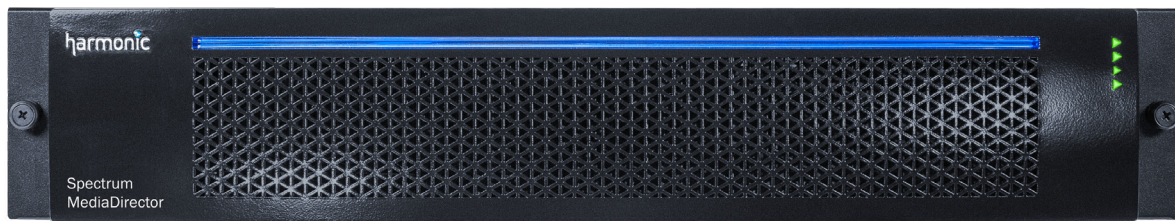

**Spectrum™ MediaDirector 2252B system controllers are the core of the Spectrum media server system, actively managing the flow of data to and from Spectrum media I/O modules and MediaStore 5000 storage arrays.**

MediaDirector 2252B provides 12 high-speed media I/O ports and the processing power to support a wide range of configurations and workflows. Its SAS interface provides redundant data paths between the MediaDirector and MediaStores.

MediaDirector can be dedicated to both real-time and IP packet processing. Three MediaDirectors can be linked together for scaling of channels or IP bandwidth – or both. MediaDirectors, individually or grouped, strictly manage overall system bandwidth to ensure uninterrupted real-time operations, even under heavy IP file-transfer loads.

MediaDirector 2252B systems are designed with a real-time Linux OS for fast startup and secure, reliable operation. In the unlikely event of a drive failure in a connected MediaStore storage array, software RAID file system management enables efficient recovery of data.

## Additional Features and Functions

**System Expansion** – A Spectrum system based on the MediaDirector 2252B can be expanded to a maximum of four MediaStore 5000 storage arrays, each containing up to 24 disk drives. Three MediaDirector 2252B units can be connected to the same file system via an Extended File Sharing (EFS) license.

**External Clock Synchronization** – An LTC input on MediaDirector supports a TOD clock.


**Resiliency** – The MediaDirector 2252B supports multiple diagnostic, monitoring and notification features for system resiliency and maximum up time, and may be configured to automatically rebuild protected MediaStore 5000 RAID sets in hot spare configurations.

## HIGHLIGHTS

- Integrates file system, management, communication and all connectivity for Spectrum media server
- 12-Gbps SAS interfaces provide multiple data paths to system storage
- 12 high-speed media I/O ports
- Enables maximum scalability of Spectrum channels and IP bandwidth
- Supports multiple diagnostic, monitoring and notification features for Spectrum system resiliency and availability

# Spectrum™ MediaDirector 2252B

SYSTEM CONTROLLER

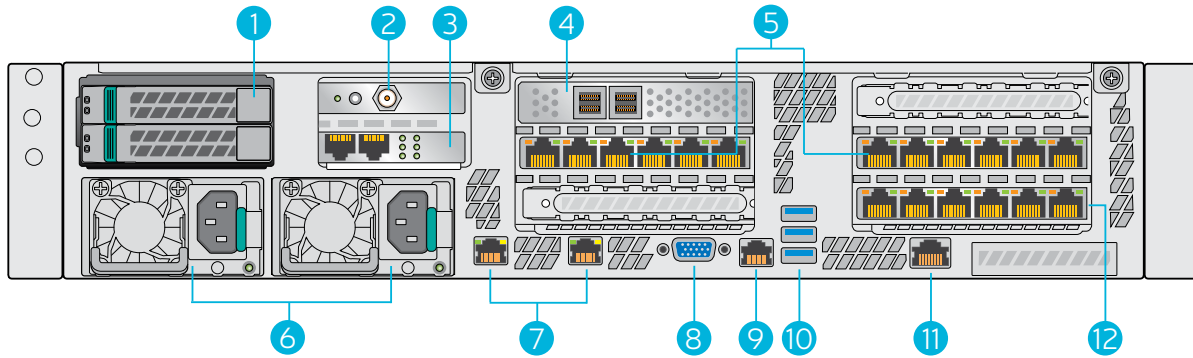

- |   |  |  |
|---|--|--|
| 1. Boot drive                                 | 5. Media Ethernet array  | 9. LAN (for Service only)  |
| 2. LTC In connector                           | 6. Redundant, hot-swappable power supplies (0, 1 from left to right) | 10. USB ports (for Service only)                                   |
| 3. 1 Gb Ethernet card (for system management) | 7. 10 Gb Ethernet ports (for file transfers)                         | 11. BMC (for Service only)   |
| 4. Serial-attached SCSI (SAS) connectors      | 8. VGA port  | 12. 1 Gb Ethernet card (for EFS private network, license required) |

## CONNECTIVITY

SAS	Two SAS 3.0 domains connect to MediaStore 5000 storage arrays via miniSAS-to-miniSAS cables.
Ethernet	NIC: Two 10-Gb Ethernet ports, copper with RJ45 connectors Base: Two 1-Gb Ethernet ports
EFS I/O	Six 1-Gb Ethernet ports for EFS private network connectivity
High-Speed Media I/O	12 1-Gb Ethernet ports
Reference	Per Spectrum media I/O module Support for multiple timing standards on a single system Reference handled by Spectrum media I/O module independently

## PHYSICAL

Dimensions (W x H x D)	17.5 in x 3.5 in x 30.75 in (2 RU)/ 44.3 cm x 8.9 cm x 78.1 cm
Weight	43.3 lbs/19.6 kg

## ENVIRONMENTAL

Operating Temperature Range	+41° to 104° F/+5° to 40° C
Operational Relative Humidity	10-80% non-condensing

## INTEGRATED SERVICES

File Access	FTP, SAMBA, AFP
API	Native player and media API

## POWER

Power Supply	Redundant
Input Voltage Range	100-240 VAC
Line Frequency	50-60 Hz
Consumption	350 W maximum

## STANDARDS & REGULATIONS

Safety	UL 60950-1 2nd Edition CSA C22.2 Information Technology Equipment - Safety - part 1: General Requirements
CE	Low Voltage Directive (73/23/EEC) including amendments EN60950: 1992, A1+A2+A3+A4 Safety of Information Technology Equipment
Electromagnetic Compliance	USA: FCC Part 15 Class A Japan: VCCI Class A Australia, New Zealand, EU: CISPR 22 Class A Taiwan: CNS 13438 Class A Canada: ICES-003 Class A EU: EN55022/EN55024 Class A

## INCLUDED ACCESSORIES

Power Cords	Two: 6 ft/1.83 m each
Rack-Mount Hardware Kit	19 in (standard)

## SPARES KITS

Part Number	Description
SPR-SPECT-SAS-CABLE-1M-001	1 m SFF-8644 to SFF-8088 SAS cable for MediaDirector 225xB connection to MediaStore 5000
SPR-SPECT-SAS-CABLE-2M-001	2 m SFF-8644 to SFF-8088 SAS cable for MediaDirector 225xB connection to MediaStore 5000
SPR-SPECT-SAS-CABLE-5M-001	5 m SFF-8644 to SFF-8088 SAS cable for MediaDirector 225xB connection to MediaStore 5000
SPR-PSU-1100-INTEL-001	Power supply, 2 RU
SPR-FAN-2U-INTEL-001	Fan, 2 RU

DigitalGlue



[www.digitalglue.com](http://www.digitalglue.com)  
[sales@digitalglue.com](mailto:sales@digitalglue.com)  
877.822.4683